REQUEST FOR PROPOSAL

ADC Drug Substance Second Source — KVX-SYN-ADC-02

RFP KVX-RFP-2026-05 | Document KVX-SCM-RFP-0105 Rev. A | Issued 2026-10-23

	Name / title	Date
Prepared by	Haruka Mori, Procurement Manager, Global Sourcing	2026-10-21
Approved by	Hana Sato, VP Supply Chain	2026-10-22

Confidential. Provided under CDA KVX-CDA-2026-022. Not for distribution.

Contents

1 Introduction 3
1.1 Purpose 3
1.2 Background 3
1.3 Confidentiality 3
2 Program Overview 3
2.1 Product Description 3
2.2 Supply Strategy 3
3 Scope of Work 3
3.1 mAb Intermediate 3
3.1.1 Cell Bank and Process 3
3.1.2 Batch Requirements 3
3.2 Conjugation and ADC Drug Substance 3
3.2.1 Process Steps 3
3.2.2 Containment 3
3.3 Analytical and Quality Control 4
4 Quality and Regulatory 4
5 Process Flow 5
6 Project Timeline 6
7 Commercial Terms and Pricing 7
8 Proposal Instructions 7
8.1 RFP Timeline 7
8.2 Contact 7
Appendix A Technical Questionnaire 7

1 Introduction

1.1 Purpose

Korvexa Life Sciences K.K. requests proposals from CDMOs to act as the second source for the drug substance of KVX-SYN-ADC-02, a site-specific cysteine-conjugated antibody-drug conjugate (ADC) for solid tumours. The second source covers the mAb intermediate, the conjugation and the ADC drug substance fill.

1.2 Background

The primary manufacturer in Japan supplies the Phase 3 study. Korvexa requires a qualified second source before the marketing application so that commercial supply does not depend on one site.

1.3 Confidentiality

This RFP is disclosed under CDA KVX-CDA-2026-022. Bidders return the signed acknowledgement and intent-to-bid form (Attachment 1) by 2026-10-30.

2 Program Overview

2.1 Product Description

The antibody is an IgG1 with two engineered cysteines; the drug-linker is a protease-cleavable linker with a topoisomerase-I inhibitor payload. The target drug-to-antibody ratio (DAR) is 4.0. The drug-linker is supplied by Korvexa; the CDMO makes the mAb intermediate.

2.2 Supply Strategy

The second source is expected to supply about 30% of commercial demand from 2029. Demand for the ADC DS is forecast at 8 kg (2029), 12 kg (2030) and 15 kg (2031) in total across both sources.

3 Scope of Work

3.1 mAb Intermediate

3.1.1 Cell Bank and Process

Korvexa transfers the WCB and the 2,000 L fed-batch process (titer 3.8 g/L). Downstream: Protein A, low-pH viral inactivation, CEX/AEX polishing, 20 nm viral filtration and UF/DF.

3.1.2 Batch Requirements

Batch	Type	Scale	Target
ENG-M1	Engineering run, mAb intermediate	2,000 L	2027 Q3
M-PPQ-01 to 03	mAb intermediate PPQ	2,000 L	2027 Q4
ENG-C1	Engineering run, conjugation	1.2 kg mAb	2027 Q3
C-PPQ-01 to 03	Conjugation PPQ	1.2 kg mAb	2028 Q1

3.2 Conjugation and ADC Drug Substance

3.2.1 Process Steps

The conjugation follows this order: partial reduction of the mAb intermediate with TCEP, conjugation with the drug-linker, quench with N-acetylcysteine, UF/DF to remove free drug-linker, formulation and 0.2 µm filtration, and fill of the ADC DS into bags frozen at ≤ −60 °C.

3.2.2 Containment

The payload is classified OEB 5 (OEL ≤ 0.1 µg/m³, 8-hour TWA). Conjugation, sampling and fill take place in isolators; cleaning verification uses a validated swab method.

3.3 Analytical and Quality Control

Release tests include DAR and drug-load distribution (HIC-HPLC), unconjugated antibody, free drug-linker (RP-HPLC), aggregates (SEC), endotoxin and bioburden. Acceptance criteria are shared after the quality agreement draft; the DAR target is 4.0.

4 Quality and Regulatory


- GMP per ICH Q7 for the mAb intermediate and the ADC DS; quality system per ICH Q10; specifications per ICH Q6B; viral safety of the mAb intermediate per ICH Q5A(R2).
- A quality agreement on Korvexa's template is signed before technology transfer.
- The CDMO supports the second-source filing (Module 3 sections for its site) and pre-approval inspections.

5 Process Flow

Figure 1 shows the full process; numbers give the step order.

Figure 1 — KVX-SYN-ADC-02 ADC drug substance process

Left: mAb intermediate suite. Right: OEB 5 conjugation suite (isolator).

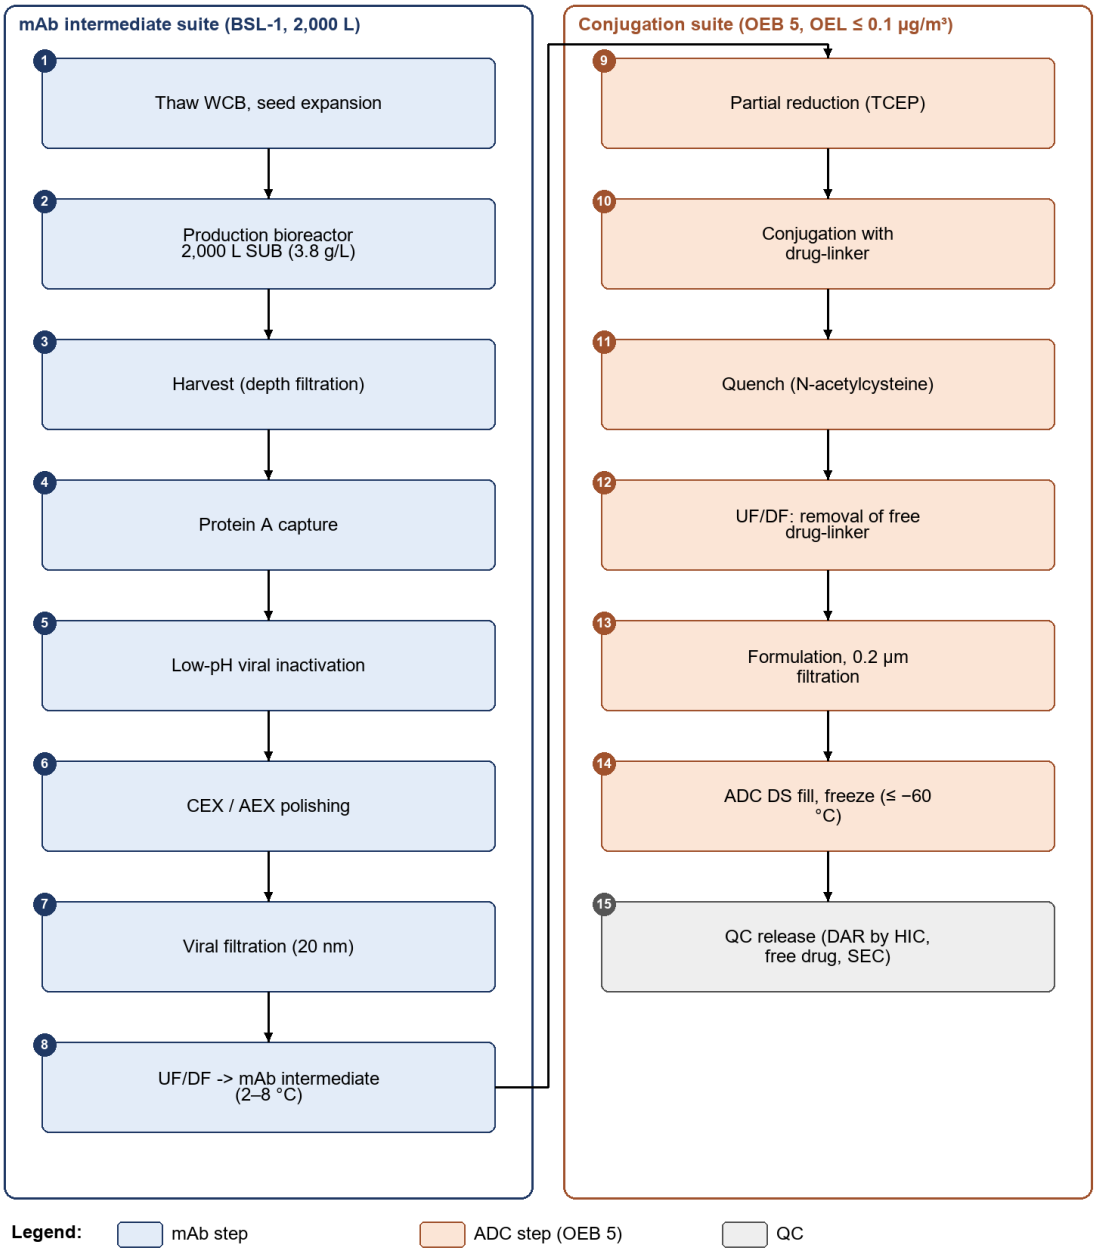

Drug-linker is supplied by Korvexa. Numbers = step order.

6 Project Timeline

Planned timeline. Shaded cells show the planned quarter; the Target column gives the planned end.

Activity	Owner	Target	2026	2027				2028	
			Q4	Q1	Q2	Q3	Q4	Q1	Q2
RFP, selection and contract	Korvexa	2027 Q1							
Technology transfer (mAb and conjugation)	CDMO	2027 Q2							
Engineering run, mAb intermediate (ENG-M1)	CDMO	2027 Q3							
Engineering run, conjugation (ENG-C1)	CDMO	2027 Q3							
mAb intermediate PPQ (3 batches)	CDMO	2027 Q4							
Conjugation PPQ (3 batches)	CDMO	2028 Q1							
PPQ stability and reports	CDMO	2028 Q2							
Regulatory filing (second source)	Korvexa	2028 Q2							

Dark cells: CDMO activity. Orange cells: Korvexa activity.

7 Commercial Terms and Pricing

Quote separately: technology transfer, engineering runs, mAb intermediate PPQ batch, conjugation PPQ batch, commercial batch prices for 2029–2031, release testing, stability per pull point, and the slot reservation fee. Batch failure attributable to the CDMO: re-manufacture at the CDMO's cost including replacement of the drug-linker up to the agreed cap. Payment: 30% at slot confirmation, 70% at QA release. Cancellation inside 6 months: 100% of the batch price. Korvexa owns all product and process IP.

8 Proposal Instructions

8.1 RFP Timeline

Milestone	Date
RFP issued	2026-10-23
Signed acknowledgement and intent to bid (Attachment 1)	2026-10-30
Deadline for written questions	2026-11-13
Answers to all bidders	2026-11-20
Proposal due	2026-12-15
Shortlist	2027-01-22
Site audit	2027-02
Award	2027-03-12

8.2 Contact

Procurement contact: Haruka Mori, Procurement Manager, Global Sourcing, haruka.mori@korvexa.example. Technical questions are sent through the procurement contact.

Appendix A Technical Questionnaire

Answer each question in the proposal, using the numbers below.

No.	Question	Response
A.1	Describe your experience with cysteine-based conjugation at ≥ 1 kg scale (number of programs, scale).	
A.2	Confirm your conjugation suite meets OEB 5 (OEL ≤ 0.1 µg/m³) and describe the isolator set-up.	
A.3	State the batch size range for conjugation (kg of mAb per batch).	
A.4	Describe how you control DAR and unconjugated antibody (in-process controls, analytics).	
A.5	State whether mAb intermediate and conjugation run at the same site, or describe the transport.	
A.6	List your HIC-HPLC, RP-HPLC and SEC capabilities for ADC release testing.	
A.7	Describe your cleaning verification approach for highly potent compounds.	
A.8	State the earliest slots for ENG-M1 and the mAb intermediate PPQ campaign.	
A.9	List regulatory inspections of the conjugation suite in the last 3 years.	
A.10	Describe your waste handling for cytotoxic waste streams.	
A.11	State your proposed number of FTEs for technology transfer.	
A.12	Confirm acceptance of Korvexa's quality agreement template or list deviations.	